


These *general* Instructions describe how to install our Treble Bleed Upgrade and Grease Bucket Upgrade products. It also discusses how to install our standard or push-pull pots – items that may also have these upgrades attached. We assume that you (*or someone you know*) are able to solder and use simple hand tools. If something can be added to these instructions to increase clarity, we warmly welcome your comments.



Treble Bleed Circuit Board Upgrade

A. How to connect and solder the Treble Bleed Upgrade to the Volume Control.

1. Remove the tape backing from the bottom of the circuit board.
2. Move the circuit board castellated notches towards the Volume control three terminals. Ensure that the circuit board notches are up against the Volume control terminals.
3. While confirming that the circuit board notches are still in contact with the volume control three terminals, press the circuit board against the back of the volume control so the tape adheres to the control. (*Note: the circuit board may need to be "angled" to contact the three terminals*).
4. Using a soldering iron, flow solder to make connection between Volume control terminals #1, #2 and #3 and the corresponding circuit board notches.

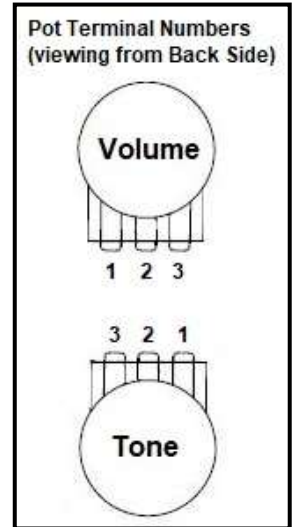



Your Treble Bleed upgrade is now installed and ready for use.

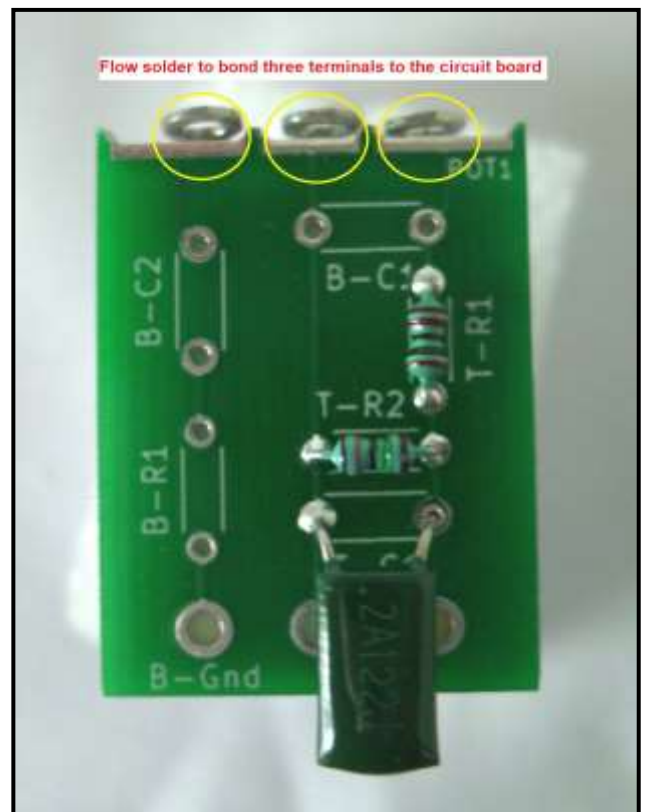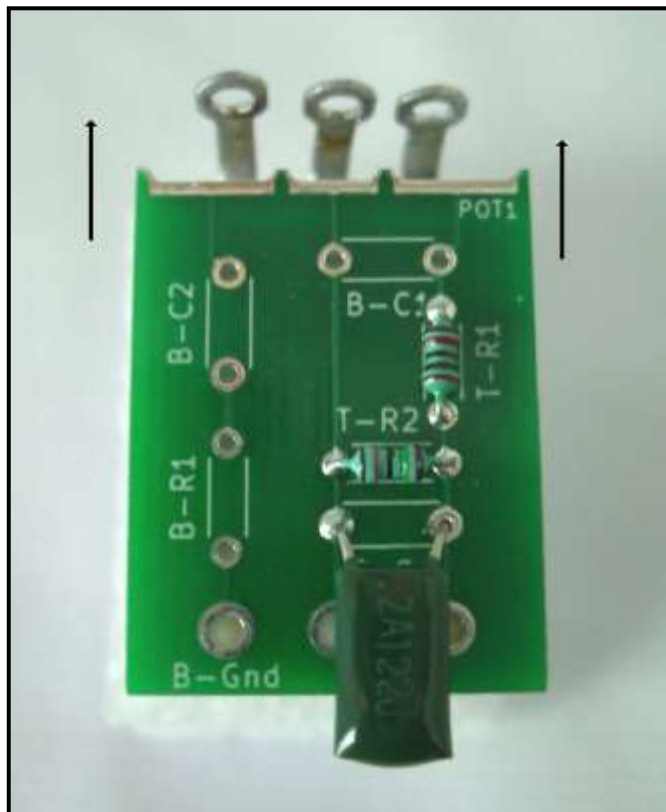



Grease Bucket Circuit Board Upgrade

B. How to connect and solder the Grease Bucket Upgrade to the Tone Control.

1. Clip the tone capacitor from the Tone control.
2. Clip the original wire connected to terminal #3 of the Tone control.
3. Remove the tape backing from the bottom of the circuit board.
4. Move the circuit board castellated notches towards the Tone control three terminals. Ensure that the circuit board notches are up against the Tone control terminals.
5. While confirming that the circuit board notches are still in contact with the volume control three terminals, press the circuit board against the back of the volume control so the tape adheres to the control. (*Note: the circuit board may need to be "angled" to contact the three terminals*).
5. Using a soldering iron, flow solder to make connection between Tone control terminals #1, #2 and #3 and the corresponding circuit board notches.

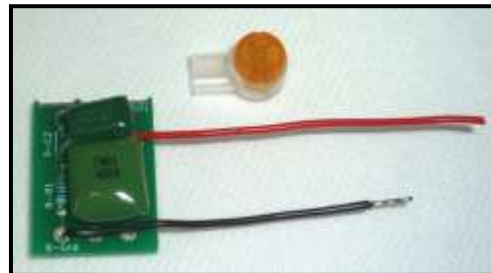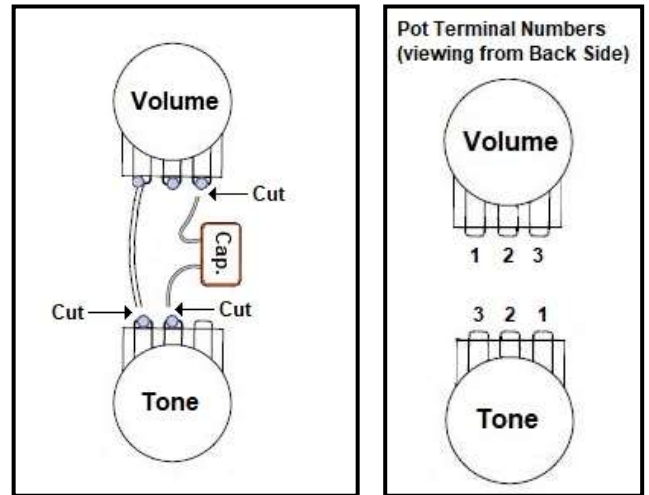

6. Using the provided UY2 connector, slide the unstripped wire you clipped from terminal #3 into the connector. Slide the **Red** wire of the upgrade into the connector. Visually confirm that all wires are "bottomed" in the connector. Use pliers to press down on the UY2 connector **yellow** button so it is flush with the clear body.
7. Using a soldering iron, attach the **Black** wire of the upgrade to a common ground.

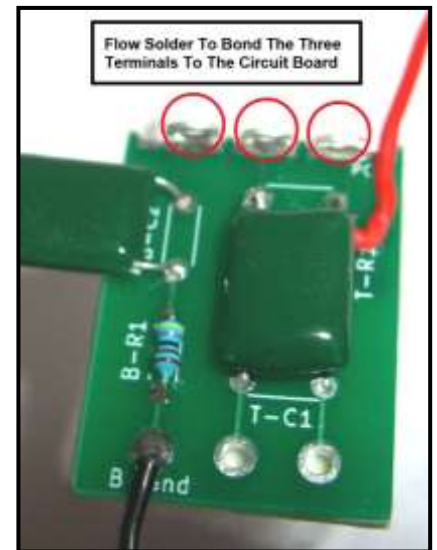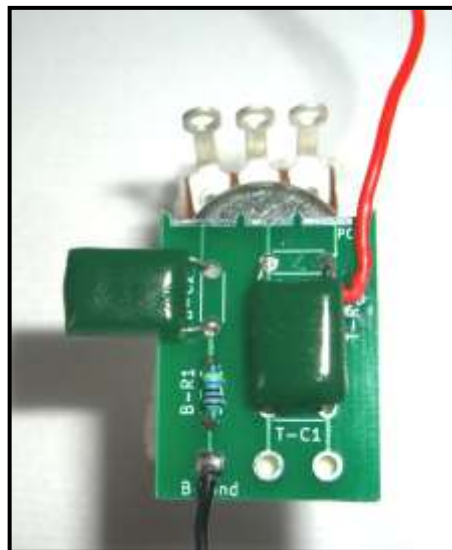


Your Grease Bucket upgrade is now installed and ready for use.

Standard Enhanced Controls *(Bourns or Import Version)*


C. Installing Your Treble Bleed Enhanced Volume Control

1. Install and fasten the enhanced volume control into a 3/8" diameter mounting hole.
2. Slide the unstripped wire from the applicable 3-way/5-way pickup blade switch or into an included UR2 connector. Slide the **Red** wire of the upgrade pot nearest to terminal #1 into the UR2 connector. If applicable, slide the unstripped wire from terminal #3 of the existing Tone control into the UR2 connector. Visually confirm that all wires are "bottomed" in the connector. Use pliers to press down on the UR2 connector red button so it is flush with the clear body.
3. Slide the unstripped output jack (+) signal wire into an included UY2 connector. Slide the **Black** wire of the upgrade pot nearest to terminal #2 into the UY2 connector. Visually confirm that all wires are "bottomed" in the connector. Use pliers to press down on the UY2 connector yellow button so it is flush with the clear body.
4. Slide the black wire of the upgrade pot nearest to terminal #3 into an included UR2 connector. Slide the unstripped output jack (-) ground wire into the UR2 connector. Slide the unstripped bridge ground wire into the UR2 connector. Visually confirm that all wires are "bottomed" in the connector. Use pliers to press down on the UR2 connector red button so it is flush with the clear body.

Your Treble Bleed Enhanced Volume control is now installed and ready for use.

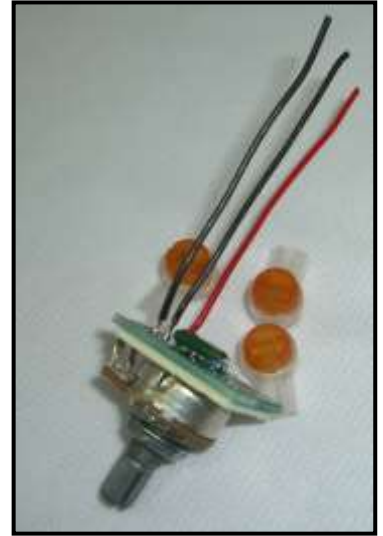


Pot Terminal Numbers
(viewing from Back Side)

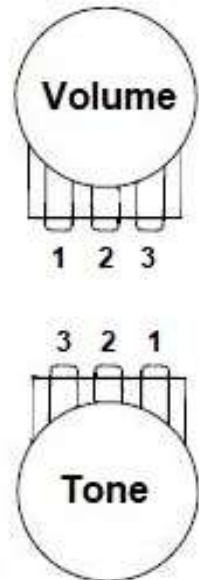

D. Installing Your Grease Bucket Enhanced Tone Control

1. Install and fasten the enhanced tone control into a 3/8" diameter mounting hole.
2. Slide the unstripped wire – from either the applicable 3-way/5-way pickup blade switch or from terminal #1 of the existing VOLUME control – into an included UY2 connector. Slide the **Red** wire of the upgrade pot into the UY2 connector. Visually confirm that all wires are "bottomed" in the connector. Use pliers to press down on the UY2 connector yellow button so it is flush with the clear body.
3. Using a soldering iron, attach the **Black** wire of the upgrade to a common ground.

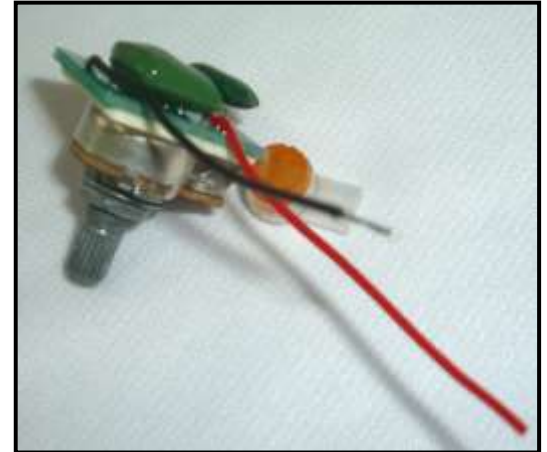

Your Grease Bucket Enhanced Tone control is now installed and ready for use.

