

# AweSome T2 Telecaster Upgrade Left-Hand Information


Updated: 04-21-2017

The following T2 telecaster upgrade information is for the left hand customer.

Left-handed customer can request the Volume-Tone controls are mounted so the Tone control is towards the rear and the Volume control is towards the neck of the instrument. The two controls will still be right-hand controls, but they will be positioned like your stock controls.

In addition, the below information identifies how to connect each of the two pairs of pickup coils to the green solderless terminal strip; as well as which pickup coil each switch controls.

The below figure shows the special left-hand layout of our T2 Telecaster upgrade.

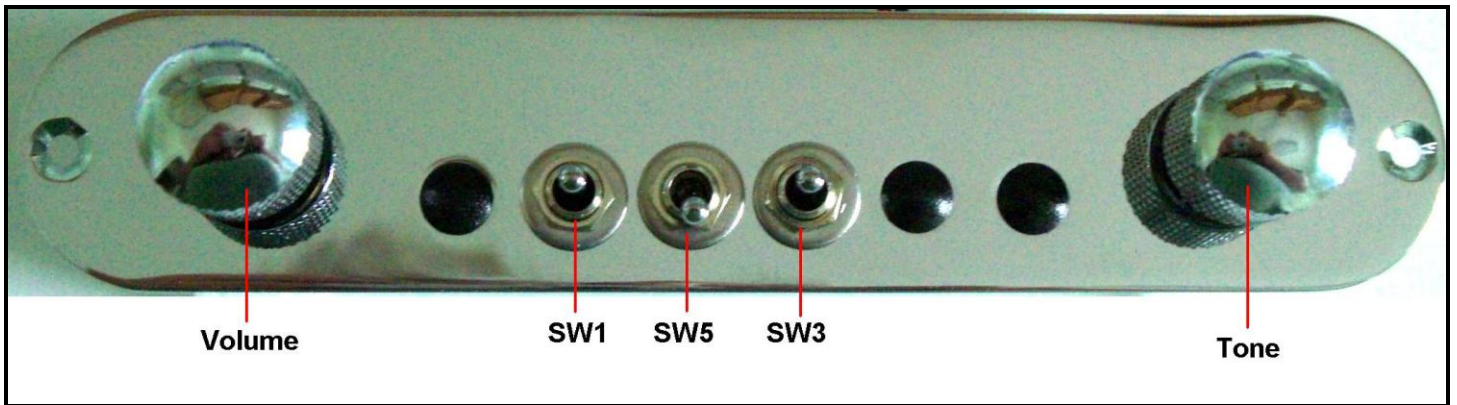

For your instrument with one single-coil bridge pickup and one single-coil neck pickup, attach the following pickup coil wire pairs to the marked connection of the green solderless terminal strip. This is done so the layout of the two separate pickups on the guitar (from rear to front) match the switches.

Neck Pickup Coil - attach the wires to the green terminal strip marked Coil-1

Bridge Pickup Coil - attach the wires to the green terminal strip marked Coil-2

For the Left-Hand user, the following switches control the identified pickups. This "reversal" applies to the normal pickup tone mapping worksheet.

SW1: Controls the Neck Pickup.

SW5: Puts these two Neck coils in Parallel or Series.

SW3: Controls the Bridge Pickup.